

## Linear Waves, Instabilities and Energy Principle

### → Contents

- this unit presents the linear structure, response theory and energetics for MHD
- proceed by:
  - a) linear waves
  - b) Least Action and Energy Principle
  - c) simple linear instabilities
- later discuss nonlinear evolution, i.e.:
  - i.e.
  - a.) MHD shocks
  - b.) collisionless shocks
  - c.) MHD turbulence (later)

### A.) Linear Waves in MHD

#### (i.) Simple Cases

- before proceeding with full cranky useful to discuss some limiting cases in depth.

- always have  $B_0 = B_0 \hat{z}$        $\rho = \rho_0, P = P_0 \rightarrow$  uniform

- consider

$y = k\hat{z}$	$\nabla \cdot \mathbf{V} = 0$	$\nabla \cdot \mathbf{V} \neq 0$
$k = k\hat{x}$	X	Magnetosonic

- parallel propagation
- perpendicular propagation

$$\rightarrow \underline{h} = h \hat{\underline{z}}, \quad \underline{\nabla} \cdot \underline{V} = 0$$

### Shear Alfvén Wave

$$\rho_0 \frac{\partial \tilde{V}}{\partial t} = - \nabla \left( \tilde{P} + \frac{\tilde{B}^2}{8\pi} \right) + \frac{B_0 \cdot \underline{\nabla} \tilde{B}}{4\pi} \quad \left. \begin{array}{l} \text{linearized} \\ \text{eqns.} \end{array} \right\}$$

$$\frac{\partial \tilde{B}}{\partial t} = B_0 \cdot \underline{\nabla} \tilde{V}$$

$$\text{Now, } \underline{\nabla} \cdot \underline{V} = 0 \Rightarrow$$

$$-\nabla^2 \left( \tilde{P} + \frac{B_0 \cdot \tilde{B}}{8\pi} \right) + B_0 \cdot \nabla \left( \underline{\nabla} \cdot \tilde{B} \right) = 0$$

$\left. \begin{array}{l} \rho_0, B_0 \\ \text{uniform} \end{array} \right\}$

$$\therefore \tilde{P} + \frac{B_0 \cdot \tilde{B}}{8\pi} = 0$$

→ "perturbed pressure balance"

→ holds for incompressible (and weakly compressible) media

$$\Rightarrow \rho_0 \frac{\partial \tilde{V}}{\partial t} = \frac{B_0}{4\pi} \frac{\partial \tilde{B}}{\partial z}$$

$$\frac{\partial \tilde{B}}{\partial t} = B_0 \frac{\partial \tilde{V}}{\partial z}$$

$$\left. \begin{array}{l} \frac{\partial^2 \tilde{V}}{\partial t^2} = \frac{B_0^2}{4\pi \rho_0} \frac{\partial^2 \tilde{V}}{\partial z^2} \end{array} \right\}$$

$$\frac{B_0^2}{4\pi\rho_0} = V_A^2 \quad \text{Alfven velocity}$$

$$\Rightarrow \left\{ \begin{array}{l} \omega^2 = k_{\parallel}^2 V_A^2 \rightarrow \text{dispersion relation for} \\ \text{shear Alfven wave} \\ v_{ph} = v_{gr} = V_A \tilde{z} \rightarrow \text{speed } \left\{ \begin{array}{l} \text{phase} \\ \text{group} \end{array} \right. \\ \text{wave propagates along } \tilde{z} \\ \text{at Alfven speed} \end{array} \right.$$

$\rightarrow$  wave is consequence of magnetic tension

$$\frac{T}{m} \rightarrow \frac{B/4\pi}{\rho_0/B} \sim \text{tension} \rightarrow \text{in line} \Rightarrow V_A^2$$

$\hookrightarrow$  mass-per-line

$$\Rightarrow \text{tension} \rightarrow \text{plucking} \Rightarrow \tilde{V} \perp \tilde{B}_0$$

(parallel variation)

c.e.  $\left\{ \begin{array}{l} \tilde{V} = \tilde{V}_x \hat{x} \\ \tilde{B} = \frac{\partial}{\partial z} (\tilde{V} \times \tilde{B}_0) = \tilde{B}_x \hat{x} \end{array} \right.$

in shear Alfven wave:

$$\left\{ \begin{array}{l} \tilde{V} \perp \tilde{B}_0 \\ \tilde{V} \parallel \tilde{B}_0, \text{ but out of phase} \end{array} \right.$$

→ energetics → construct "Poynting theorem"

$$\rho_0 \frac{\partial \tilde{V}}{\partial t} = \frac{\mu_0}{4\pi} \frac{\partial}{\partial z} \tilde{B} \quad (1)$$

$$\frac{\partial \tilde{B}}{\partial t} = \mu_0 \frac{\partial}{\partial z} \tilde{V} \quad (2)$$

∴ construct energy evolution

$$\mathcal{E} = \frac{\rho_0 \tilde{V}^2}{2} + \frac{\tilde{B}^2}{8\pi} \rightarrow \text{energy density}$$

∴ (1) -  $\tilde{V}$  and (2) -  $\tilde{B}$  ⇒

$$\frac{\partial}{\partial t} \left( \rho_0 \frac{\tilde{V}^2}{2} + \frac{\tilde{B}^2}{8\pi} \right) = \frac{\mu_0}{4\pi} \left( \tilde{V} \cdot \frac{\partial \tilde{B}}{\partial z} + \tilde{B} \cdot \frac{\partial \tilde{V}}{\partial z} \right)$$

$$\frac{\partial}{\partial t} \left( \rho_0 \frac{\tilde{V}^2}{2} + \frac{\tilde{B}^2}{8\pi} \right) = \frac{\mu_0}{4\pi} \frac{\partial}{\partial z} (\tilde{V} \cdot \tilde{B})$$

and have Poynting form:  $\frac{\partial \mathcal{E}}{\partial t} + \underline{D} \cdot \underline{S} = 0$

$$\underline{S} = -\frac{\mu_0}{4\pi} (\underline{V} \cdot \underline{B}) \rightarrow \text{wave energy density flux}$$

$$\int d\Omega \underline{V} \cdot \underline{B} \rightarrow \text{cross helicity}$$

N.B.  $\underline{S} = \frac{c}{4\pi} \underline{E} \times \underline{B}$ ,  $\underline{\rho} = \underline{S}/c^2$

$\begin{matrix} \underline{S} \\ \text{wave energy density flux} \end{matrix} \xrightarrow{4\pi}$

$\underline{E} = -\frac{\underline{v} \times \underline{B}_0}{c}$   $\xrightarrow{\text{wave momentum density}}$

$$\begin{aligned} \underline{S} &= -\frac{1}{4\pi} (\underline{v} \times \underline{B}_0) \times \tilde{\underline{B}} = \frac{1}{4\pi} \left[ (\tilde{\underline{B}} \cdot \underline{B}_0) \underline{v} - (\underline{v} \cdot \tilde{\underline{B}}) \underline{B}_0 \right] \\ &= -\frac{\underline{B}_0}{4\pi} (\underline{v} \cdot \tilde{\underline{B}}) \end{aligned}$$

$$\underline{S} = -\frac{\underline{B}_0}{4\pi} \underline{v} \cdot \underline{B}$$

i.e. — energy flows along field

$$-\underline{S} \sim \underline{v} \cdot \underline{B}$$

$$H_c = \int d\vec{x} \times \tilde{\underline{v}} \cdot \tilde{\underline{B}} \quad \rightarrow \text{cross helicity}$$

→ conserved in ideal MHD

Ex.: Show  $H_c$  conserved.

→ another way to formulate shear Alfvén wave

since  $\tilde{\underline{v}} \perp \underline{B}_0$  write  $\tilde{\underline{v}} = \frac{\partial \phi}{\partial t} \times \tilde{\underline{z}}$   
 $\tilde{\underline{B}} \perp \underline{B}_0$   $\tilde{\underline{B}} = \frac{\partial A}{\partial t} \times \tilde{\underline{z}}$   $\xrightarrow{\text{magnetic potential}}$

i.e.  $\underline{E} = \underline{E}_\perp$  so  $\tilde{\underline{v}} = \frac{c}{B_0^2} \underline{E} \times \underline{B}_0$  in shear Alfvén

$$\text{Now, } \frac{\partial \underline{V}}{\partial t} = -\frac{1}{\rho_0} \nabla \left( \rho + \frac{B^2}{8\pi} \right) + \frac{B_0 \cdot \nabla B}{4\pi \rho_0}$$

as  $\underline{V}, \underline{B} \perp B_0$ , take  $\hat{z} \cdot \nabla \times$   $\Rightarrow$

$$\hat{z} \cdot \frac{\partial \underline{V}}{\partial t} = 0 + \frac{B_0 \partial}{4\pi \rho_0 \partial z} \hat{z} \cdot (\nabla \times \underline{B})$$

$$\text{Now, } \underline{V} = \underline{\nabla} \phi \times \hat{z} = (\partial_y \phi - \partial_x \phi, 0) \quad \hat{z} \cdot \nabla \times \underline{B} = \frac{4\pi}{c} \tilde{J}_2$$

$$\underline{\omega}_z = \hat{z} \cdot \underline{\omega} = -\nabla_z^2 \phi \rightarrow \hat{z} \text{ component vorticity} \quad \nabla(\underline{\nabla} \cdot \underline{A}) - \nabla^2 A = +\frac{4\pi}{c} \tilde{J}_2$$

$\Rightarrow$  magnetic torque

$$\frac{\partial \nabla_z^2 \phi}{\partial t} = \frac{B_0}{4\pi \rho_0} \frac{\partial}{\partial z} \nabla_z^2 A$$

$$\underbrace{\text{vorticity}}_{\text{evolution}} \quad \nabla \times (\underline{I} \times \underline{A})$$

$$\text{and } \frac{\partial \underline{B}}{\partial t} = \frac{B_0 \partial}{\partial z} \underline{V} \quad \text{and } \hat{z} \cdot \nabla \times \Rightarrow$$

$$\frac{\partial \nabla_z^2 A}{\partial t} = B_0 \frac{\partial}{\partial z} \nabla_z^2 \phi$$

$$\underbrace{\text{current}}_{\text{evolution}} \quad \text{II vorticity gradient}$$

observe if " $\nabla \cdot \underline{V} - \nabla_{\perp}^2$ ", have:

$$\frac{\partial A}{\partial t} - B_0 \frac{\partial \phi}{\partial z} = 0$$

$\Rightarrow$  basically means  $E_{\parallel} = 0$  for Alfvén waves.

$$\underline{E} = -\frac{\underline{V} \times \underline{B}_0}{c}, \therefore \hat{z} \cdot \frac{\hat{z}}{c} \underline{V} \times \underline{B}_0 \hat{z} = 0 \quad \checkmark$$

$\therefore$  can write shear Alfvén wave equations as

$$\left. \begin{aligned} E_{\parallel} &= 0 = \frac{\partial A}{\partial t} - B_0 \frac{\partial \phi}{\partial z} = 0 \\ \frac{\partial \cdot \nabla_{\perp}^2 \phi}{\partial t} &= \frac{B_0}{4\pi \rho} \frac{\partial \nabla_{\perp}^2 A}{\partial z} \end{aligned} \right\}$$

$\Rightarrow$  example of 'reduced equations'.

Now, need also consider:

$$\rightarrow k = k\hat{z}, \quad \underline{D} \cdot \underline{V} \neq 0$$

What happens?

$$\text{Now, } \frac{\partial \underline{V}}{\partial t} = -\left(\frac{1}{C_0}\right) \nabla \left( \tilde{\rho} + \frac{B_0 \cdot \tilde{B}}{4\pi} \right) + \frac{B_0 \cdot \nabla B}{4\pi C_0}$$

$$\frac{\partial \tilde{B}}{\partial t} = B_0 \cdot \nabla \underline{V} - B_0 \underline{V} \cdot \tilde{B}$$

$$k = k_z \quad \underline{V} \cdot \underline{V} \neq 0$$

$$\Rightarrow \frac{\partial \tilde{V}_z}{\partial t} = -\frac{\partial}{\partial z} \left( \frac{\tilde{\rho}}{\rho_0} \right) - \frac{\partial}{\partial z} \left( \frac{B_0 \cdot \tilde{B}}{4\pi C_0} \right) + B_0 \frac{\partial}{\partial z} \left( \frac{\tilde{B}_z}{4\pi \rho_0} \right)$$

$$\frac{\partial \tilde{B}_z}{\partial t} = B_0 \cancel{\frac{\partial}{\partial z} \tilde{V}_z} - B_0 \cancel{\frac{\partial}{\partial z} \tilde{V}_z}$$

∴ all that's left is simple acoustic mode

$$\frac{\partial \tilde{V}_z}{\partial t} = -\frac{\partial}{\partial z} \left( \frac{\tilde{\rho}}{\rho_0} \right)$$

$$\frac{\tilde{\rho}}{\rho_0} = \gamma \frac{\tilde{\rho}}{\rho_0} \quad \text{from } \rho = \rho_0 (\gamma/\rho_0)^{\gamma}$$

$$\frac{\partial \tilde{\rho}}{\partial t} = -\rho_0 \nabla \cdot \tilde{V} = -\rho_0 \frac{\partial}{\partial z} \tilde{V}_z$$

$$\Rightarrow \frac{\partial^2 \tilde{\rho}}{\partial t^2} = \gamma \frac{\rho_0}{\rho_0} \frac{\partial^2 \tilde{\rho}}{\partial z^2}$$

76.

$$\Rightarrow \omega^2 = c_s^2 k_z^2 , \quad c_s^2 = \gamma \frac{\rho}{\rho_0}$$

↑  
"stiffness"

↓  
D energy  
density

$\rightarrow k = k \hat{x}$  - Perpendicular Propagation

Now  $\underline{B} = B_0 \hat{z}$ , so

$\rightarrow k = k \hat{x}$  must compress magnetic field

$\rightarrow$  no incompressible cross-field propagation is  
possible

Now

$$\frac{\partial \underline{v}}{\partial t} = - \frac{1}{\rho_0} \nabla \left( \rho + \frac{\underline{B}^2}{8\pi} \right) + \frac{B_0 i}{4\pi \rho_0} \nabla \underline{B}$$

2nd

$$\frac{\partial \underline{B}}{\partial t} = \frac{B_0}{\rho_0} \nabla \underline{v} = \text{freezing in}$$

so can take short-cut via:

$$\frac{d}{dt} \frac{\underline{B}}{\rho} = 0 \Rightarrow \underline{B} = B_0 \frac{\underline{v}}{\rho_0}$$

77

$$\therefore \frac{\partial V}{\partial t} = -\frac{1}{\rho_0} \nabla \left( P_T + P_B \right)$$

⌈ thermal  
 ⌋  
 ⌈ magnetic ⌉

$$P_T = P_0 (\tilde{\epsilon}/\rho_0)^\gamma, \quad \tilde{P}_T = \gamma P_0 (\tilde{\epsilon}/\rho_0)$$

$$P_B = B^2/8\pi, \quad \tilde{P}_B = 2 \frac{B_0^2}{8\pi} (\tilde{\epsilon}/\rho_0)$$

(i.e. " $\gamma_{eff}$ " = 3 for field)

$$\frac{\partial}{\partial t} (\nabla \cdot \tilde{V}) = - \nabla^2 \left[ \frac{\gamma P_0}{\rho_0} + \frac{2 B_0^2}{8\pi \rho_0} \right] \frac{\tilde{\epsilon}}{\rho_0}$$

$$\text{but } \nabla \cdot \tilde{V} = - \frac{\partial}{\partial t} \frac{\tilde{\epsilon}}{\rho_0}$$

$$\Rightarrow \frac{\partial^2}{\partial t^2} \left( \frac{\tilde{\epsilon}}{\rho_0} \right) = \nabla^2 \left[ \frac{\gamma P_0}{\rho_0} + \frac{2 B_0^2}{8\pi \rho_0} \right] \left( \frac{\tilde{\epsilon}}{\rho_0} \right)$$

$$= \nabla^2 \left[ C_s^2 + V_A^2 \right] \left( \frac{\tilde{\epsilon}}{\rho_0} \right)$$

$$\boxed{\omega^2 = k_\perp^2 (C_s^2 + V_A^2)}$$

$\rightarrow$  "magneto sonic"  
 "compressional A/fren wave"

N.B. :

- magnetosonic wave has  $c^2 = c_s^2 + v_A^2$
- ↔ combines acoustic, magnetic speeds
- always faster (higher phase speed) than shear Alfvén or acoustic mode.

i.e.  $k = k_1$  magnetosonic wave is "faster" MHD wave

- recalling class discussion  $\Rightarrow$  how reconcile?
- magnetosonic wave carried by field energy density  $\rightarrow B_0^2 / 8\pi\rho_0$

yet

- $v_{magn}^2 = v_A^2$ , as in shear Alfvén, which is carried by magnetic tension  $B_0^2 / 4\pi\rho_0$ .

Resolution : Freezing-in condition  $\Rightarrow B/\rho = \text{const.}$ ,  
here

$$\Rightarrow \gamma_{\text{eff}} = 2$$

i.e. freezing-in condition  $\Rightarrow$  field is stiff - indeed stiffer than gas,  $\gamma = 5/3$  - acoustic medium


$$\text{i.e. } C_s^2 = c_s^2 + c_B^2$$

$$= \frac{dP_{Th}}{d\rho} + \frac{dP_B}{d\rho}$$

$$= \gamma \frac{P_{Th}}{P_0} + 2 \frac{P_B}{P_0}$$

$$\text{i.e. for } \beta = P_{Th}/P_B = 1 \Rightarrow c_B^2 > c_s^2$$

To can summarize simple cases :

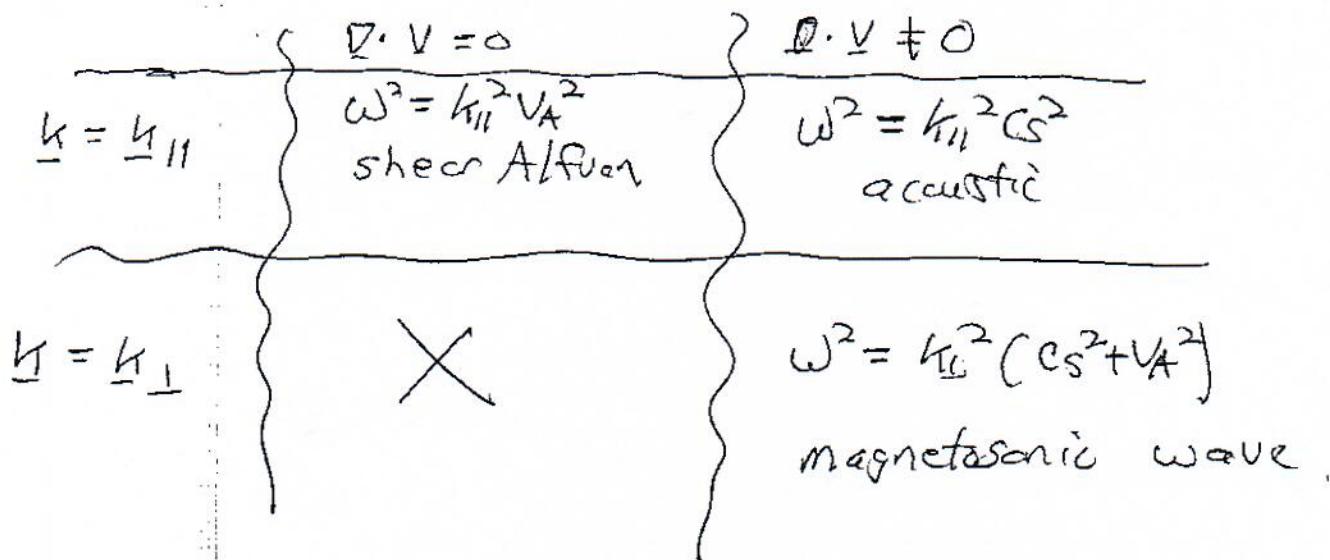


Note that magnetosonic is 'fastest' of waves.

(c.) Full Crank - Read Kulsrud, Chapt. 5

Now, consider full crank, for arbitrary  $\underline{k}$ .

geometry:



$$\left\{ \begin{array}{l} \rho_0 = \rho_\infty = \text{const} \\ \underline{B} = B_0 \underline{z} \end{array} \right.$$

have MHD equations:

$$\frac{\partial \underline{v}}{\partial t} + \nabla \cdot (\rho \underline{v}) = 0$$

$$\rho \frac{\partial \underline{v}}{\partial t} = -\nabla p + \frac{\underline{J} \times \underline{B}}{\sigma}$$

$$\frac{\partial \underline{B}}{\partial t} = \underline{\epsilon} \times (\underline{v} \times \underline{B})$$

$$\frac{d(\rho/\rho^\infty)}{dt} = 0 \Rightarrow \frac{1}{\rho} \frac{dp}{dt} - \gamma \frac{dp}{\rho} = 0$$

and continuity  $\Rightarrow$

$$\frac{1}{\rho} \frac{dp}{dt} = -\gamma \underline{\epsilon} \cdot \underline{v}$$

Now convenient to write  $\underline{v}(x, t) = \frac{\partial \underline{\epsilon}}{\partial t}(x, t)$

$\underline{\epsilon}(x, t) \equiv \text{displacement of fluid element,}$   
originally at  $x$  at  $t$

$\Rightarrow$  with linearization  $\tilde{\underline{v}} = \frac{\partial \underline{\epsilon}}{\partial t}, \rho = \rho_0 + \delta\rho, \text{etc.}$

$$\delta\rho = -\rho_0 \underline{\nabla} \cdot \underline{\epsilon}$$

$$\delta P = -\gamma \rho_0 \underline{\nabla} \cdot \underline{\epsilon}$$

$$\delta \underline{B} = \nabla \times (\underline{\epsilon} \times \underline{B}_0)$$

$$\rho_0 \frac{\partial \underline{\epsilon}}{\partial t^2} = -\nabla \delta P + \underbrace{(\delta \underline{J} \times \underline{B}_0)}_{\text{C}}$$

so can assemble the pieces, assuming  $\underline{\epsilon} = \underline{\epsilon}_k e^{i(k \cdot x - \omega t)}$   
and omitting subscript  $\Rightarrow$

$$-\rho_0 \omega^2 \underline{\epsilon} = -\gamma \rho_0 \underline{h} (\underline{k} \cdot \underline{\epsilon}) - \frac{1}{4\pi} \left[ \underline{k} \times (\underline{k} \times (\underline{\epsilon} \times \underline{B}_0)) \right] \times \underline{B}_0$$

from induction

- eigenmode equation for arbitrary displacement
- note as  $\underline{\epsilon}$  is a 3 component vector above  
is 3 linearly coupled equations.  $\omega^2$  is the eigenvalue! So ...

so - solution is  $\det |3 \times 3| \Rightarrow$  cubic equation  
for  $\omega^2$ .  $\Rightarrow$  expect 3 waves.

N.B.: Based on simple cases, what might these  
be?

$$-\rho_0 \omega^2 \underline{\epsilon} = -\gamma A_0 \underline{k} (\underline{k} \cdot \underline{\epsilon}) - \frac{1}{4\pi} \left\{ \underline{k} \times [\underline{k} \times (\underline{\epsilon} \times \underline{B}_0)] \right\} \times \underline{B}_0$$

$\Rightarrow$  the 3 waves are, for the obvious profound reason,  
called the "fast", "slow" and "intermediate"  
waves...

- now,  $\begin{cases} \underline{k} = k(\sin\theta \hat{x} + \cos\theta \hat{z}) \\ \underline{\epsilon} = \epsilon \hat{y} \end{cases}$  oblique in  
choose:  $\underline{\epsilon} = \epsilon \hat{y}$  d.e.  $\underline{k} \cdot \underline{\epsilon} = 0 \Rightarrow \underline{D} \cdot \underline{\epsilon} = 0$

$\Rightarrow$  "intermediate wave"  $\rightarrow$  clearly shear Alfvén

now  $\underline{k} \cdot \underline{\epsilon} = 0$

and crank  $\Rightarrow \left[ \underline{k} \times [\underline{k} \times (\underline{\epsilon} \times \underline{B}_0)] \right] \times \frac{\underline{B}_0}{4\pi}$

$$= \left( \frac{\underline{k} \cdot \underline{B}_0}{4\pi} \right) \left[ \underline{k} \times (\underline{\epsilon} \times \underline{B}_0) \right]$$

$$= \left( \frac{\underline{k} \cdot \underline{B}_0}{4\pi} \right)^2 \underline{\epsilon}$$

$$\underline{\omega} - \rho \omega^2 \underline{\Sigma} = - \frac{k_i \cdot B_0}{4\pi} \omega^2 \underline{\Sigma}$$

$$\underline{\Sigma} = \Sigma_y \hat{y}$$

$$\Rightarrow \omega^2 = k_{\parallel}^2 V_A^2 \quad \text{with } \underline{\Sigma} = \Sigma_y \hat{y}$$

shear Alfvén  $\rightarrow$  physical properties as before

$\therefore$  "intermediate wave" is shear Alfvén

$\stackrel{\text{so}}{=}$  "fast wave" must connect to magnetosonic

$\therefore$  "slow wave" must connect to acoustic

Let's see now

- fast and slow waves:

$$\text{again: } \underline{k} = k (\sin\theta \hat{x} + \cos\theta \hat{z})$$

$$\underline{\Sigma} = \Sigma_x \hat{x} + \Sigma_z \hat{z}$$

point here is that  $\underline{k} \cdot \underline{\Sigma} \neq 0 \Rightarrow$  unlike intermediate, these are compressional

so now, crank  $\Rightarrow$

$$\frac{1}{4\pi} \left\{ k \times [k \times (\underline{\epsilon} \times \underline{B_0})] \right\} \times \underline{B_0} = -k^2 B_0^2 \underline{\epsilon}_x \hat{x}$$

and

$$-\nabla P_1 = -\gamma \rho_0 k (\underline{\epsilon} \cdot \underline{\epsilon})$$

$$\text{so } -\frac{\partial P_1}{\partial x} = -k^2 \gamma \rho_0 (\sin^2 \theta \underline{\epsilon}_x + \sin \theta \cos \theta \underline{\epsilon}_z)$$

$$-\frac{\partial P_1}{\partial z} = -k^2 \gamma \rho_0 (\sin \theta \cos \theta \underline{\epsilon}_x + \cos^2 \theta \underline{\epsilon}_z)$$

now, defining

$$\begin{aligned} C_s^2 &= \gamma \rho_0 / \rho_0 \\ V_A^2 &= B_0^2 / 4\pi \rho_0 \end{aligned} \quad \} \text{ as usual} \Rightarrow$$

$$-\omega^2 \underline{\epsilon}_x = -k^2 (C_s^2 \sin^2 \theta + V_A^2) \underline{\epsilon}_x - k^2 C_s^2 \sin \theta \cos \theta \underline{\epsilon}_z$$

$$-\omega^2 \underline{\epsilon}_z = -k^2 C_s^2 \sin \theta \cos \theta \underline{\epsilon}_x - k^2 C_s^2 \cos^2 \theta \underline{\epsilon}_z$$

$\Rightarrow$  coupled equations for  $\underline{\epsilon}_x, \underline{\epsilon}_z$

$\Rightarrow$  standard crank gives:

$$\begin{vmatrix} k^2 V_A^2 + k^2 C_s^2 \sin^2 \theta - \omega^2 & k^2 C_s^2 \sin \theta \cos \theta \\ k^2 C_s^2 \sin \theta \cos \theta & k^2 C_s^2 \cos^2 \theta - \omega^2 \end{vmatrix} = 0$$

and

$$\omega^2 - k^2 (c_s^2 + v_A^2) \omega^2 + k^4 c_s^2 v_A^2 \cos \theta = 0$$

is "the dispersion relation".

Now can solve  $\omega$ :

$$\frac{\omega^2}{k^2} = \frac{v_A^2 + c_s^2}{2} \pm \frac{1}{2} \left[ (v_A^2 - c_s^2)^2 + 4 c_s^2 v_A^2 \sin^2 \theta \right]^{1/2}$$

$\rightarrow$  upper root  $\rightarrow$  "fast" wave  
 $\rightarrow$  lower root  $\rightarrow$  "slow" wave.

Now, check:

$$\sin \theta = 0 \Rightarrow k = k \hat{z}$$

$$\frac{\omega^2}{k^2} = \frac{v_A^2 + c_s^2}{2} \pm \frac{(v_A^2 - c_s^2)}{2} \rightarrow \begin{cases} v_A^2 & \rightarrow Alfvén \\ c_s^2 & \rightarrow \text{acoustic} \end{cases}$$

$$\sin \theta = 1 \Rightarrow k = k \hat{x}$$

$$\frac{\omega^2}{k^2} = \frac{v_A^2 + c_s^2}{2} \pm \frac{1}{2} \left[ (v_A^2)^2 + (c_s^2)^2 - 2 v_A^2 c_s^2 + 4 c_s^2 v_A^2 \right]^{1/2}$$

$$= \frac{v_A^2 + c_s^2}{2} \pm \frac{1}{2} \left[ (v_A^2 + c_s^2)^2 \right]^{1/2} = \begin{cases} 0 \\ \sqrt{v_A^2 + c_s^2} \end{cases}$$

Magnetosonic wave.

Note: can observe:

- for  $\perp$  propagation, fast wave  $\leftrightarrow$  magnetosonic wave  
[slow=intermediate wave:  $\omega^2 = 0$ ]
- for  $\parallel$  propagation, fast  $\leftrightarrow$  Alfvén  $\checkmark$  ( $\beta \ll 1$ )  
slow  $\leftrightarrow$  acoustic  $\checkmark$  ( $\beta > 2$   
Vice versa)
- always have  $v_{ph\_slow}^2 \leq v_{ph\_int}^2 \leq v_{ph\_fast}^2$

Have general result that polarizations of  
fast and slow modes are orthogonal

can show via:

$\rightarrow$  matrix from eqns  $\leftrightarrow 2 \times 2$

$$-\rho \omega_s^2 \underline{\underline{\epsilon}}_s = \underline{\underline{M}} \cdot \underline{\underline{\epsilon}}$$
 (1)

$$-\rho \omega_f^2 \underline{\underline{\epsilon}}_f = \underline{\underline{M}} \cdot \underline{\underline{\epsilon}}_f$$
 (2)

$$\underline{\underline{\epsilon}}_f \cdot (1) - \underline{\underline{\epsilon}}_s \cdot (2) \Rightarrow$$

$$-\rho (\omega_s^2 - \omega_f^2) \underline{\underline{\epsilon}}_s \cdot \underline{\underline{\epsilon}}_f = \underline{\underline{\epsilon}}_f \cdot \underline{\underline{M}} \cdot \underline{\underline{\epsilon}}_s - \underline{\underline{\epsilon}}_s \cdot \underline{\underline{M}} \cdot \underline{\underline{\epsilon}}_f$$

but: recall from determinant

$$\underline{M} = - \begin{bmatrix} k^2 V_A^2 + k^2 c_s^2 \sin^2 \theta, & k^2 c_s^2 \sin \theta \cos \theta \\ k^2 c_s^2 \sin \theta \cos \theta, & k^2 c_s^2 \cos^2 \theta \end{bmatrix}$$

and  $\underline{M}^T = \underline{M}$  so  $\underline{M}$  self-adjoint  
 $\Rightarrow \underline{\epsilon}_f \cdot \underline{M} \cdot \underline{\epsilon}_s = \underline{\epsilon}_s \cdot \underline{M} \cdot \underline{\epsilon}_f$

$\hookrightarrow \left. \begin{array}{l} \text{important} \\ \text{structural} \\ \text{property in} \\ \text{linear NHO} \end{array} \right\}$

so  $\underline{\epsilon}_f \cdot \underline{\epsilon}_s = 0$

$\rightarrow$  to yet further elucidate the waves  
 can consider two limits  $\beta \ll 1 \rightarrow c_s^2/V_A^2 \ll 1$   
 $\beta \gg 1 \rightarrow c_s^2/V_A^2 \gg 1$ .

a) for  $c_s^2 \gg V_A^2$ ,

1. ord.  $\omega_f^2 = k^2 c_s^2, \quad \omega_s = 0$

1<sup>st</sup> ord.  $\frac{\omega_f}{k} \sim c_s + \frac{V_A^2 \sin^2 \theta}{2c_s}$

$\tilde{\underline{\epsilon}} \parallel \underline{k}$   
 (note  $\underline{\epsilon}_f \cdot \underline{\epsilon}_s = 0$ )

$\frac{\omega_s^2}{k^2} \approx V_A^2 \cos^2 \theta$

$\tilde{\underline{\epsilon}} \perp \underline{k}$

(otherwise  $\tilde{p} \rightarrow$  higher  $\omega$ )

b) for  $C_s^2 \ll V_A^2$ ,

$$\frac{\omega_f^2}{k^2} \approx V_A^2 + C_s^2 \sin^2 \theta$$

$$\frac{\omega_s^2}{k^2} \approx C_s^2 \cos^2 \theta$$

and again,  $\underline{\epsilon}_s \cdot \underline{\epsilon}_f = 0$

$$\underline{\epsilon} \perp \underline{B_0}$$

(or no "springiness" to drive fast motion in parallel dir.)


$$\underline{\epsilon} \parallel \underline{B_0}$$

(otherwise,  $f \propto \epsilon \perp B \rightarrow$   
get Alfvén)

→ Now can sum up this slow, intermediate, fast story in the Fredricks Diagram:

consider  $C_s \ll V_A$ ,  $C_s \gg V_A$

a.)  $C_s \ll V_A$   
 $(V_A^2 + C_s^2)^{1/2} \theta = \pi/2$

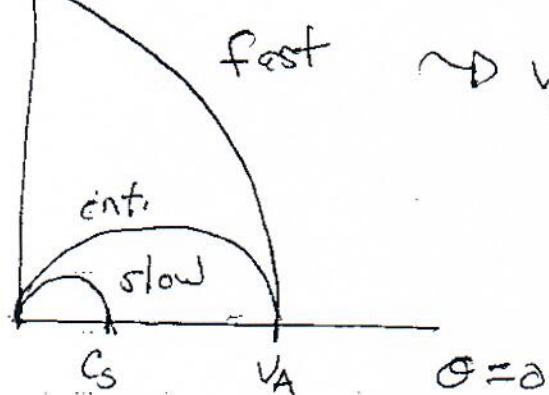


$\rightsquigarrow V_{\text{phase}} \text{ vs } \theta$  for:

fast  $\rightarrow$  magnetosonic at  $\perp$   
Alfvén at  $\parallel$

int  $\rightarrow$  Alfvén at  $\parallel$   
nothing at  $\perp$

slow  $\rightarrow$  acoustic (parallel) at  $\parallel$   
nothing at  $\perp$ .

8%

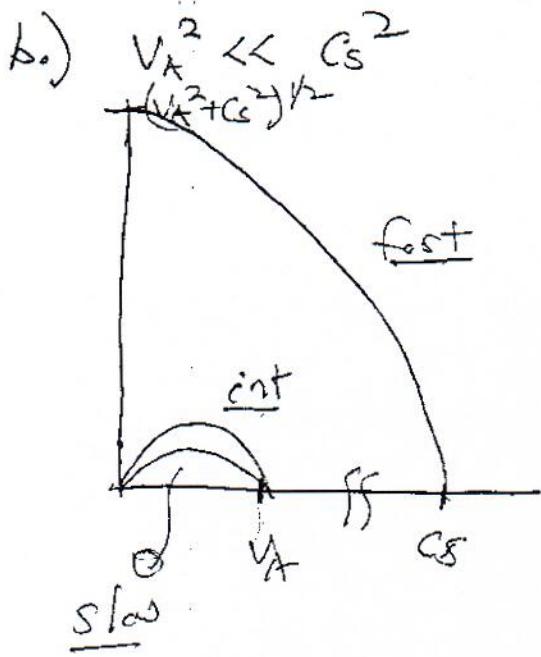

again:

fast  $\rightarrow$  magnetoelectric at  $\perp$   
 Alfvén at  $\parallel$

int.  $\rightarrow$  Alfvén at  $\parallel$   
 nothing at perf.

slow  $\rightarrow$  Alfvén at  $\parallel$   
 nothing at  $\perp$

$\rightarrow$  now observe the following:

$\rightarrow$  3 components  $\Sigma$   
 $\rightarrow$  2 component  $\underline{B}$  ( $\nabla \cdot \underline{B} = 0$ )

$\rightarrow \rho, \rho$

$\Rightarrow$

$\therefore 7$  fields

at 6 waves  $\rightarrow$  2 each

$$\omega^2 = \dots$$

$\left\{ \begin{array}{l} \text{fast} \\ \text{intermediate} \\ \text{slow} \end{array} \right.$

so, 1 missing mode!  $\rightarrow$  entropy mode!

$$\text{i.e. } S = T \ln(\rho/\rho_0)$$

$$\text{and assumed } P_1/P_0 = \gamma C_1/C_0$$

if relax  $\Rightarrow$  entropy wave  $\left\{ \begin{array}{l} \delta\rho \neq 0, \text{ if else} = 0 \\ \omega = 0 \end{array} \right.$   
 relevant in shocks

$\rightarrow$  some concluding philosophy  $\Rightarrow$  what is  
 the moral of this story of the  
 trip to the zoo of MHD waves?

- even for  $\odot$  simple dynamical model like ideal MHD, even minimal anisotropy adds reduces great complexity!
- signal propagation  $\left\{ \begin{array}{l} \text{parameter dependent} \\ \text{anisotropic} \\ \text{has definite polarization} \end{array} \right.$
- important to understand  $\left\{ \begin{array}{l} \text{magnetic pressure} \\ \text{magnetic tension} \\ \text{thermal pressure} \end{array} \right.$   
 as origins of anisotropic restoring force in waves.